

FIGHTER X

FN62F HD R MINING EQUIPMENT | 270PS | 6X4



FEBRUARI 25



www.ktbfuso.co.id



Performa



*Tersedia 2 tipe ban:
Radial & Bias

270PS Common Rail

Mesin 6M60 yang dilengkapi dengan **Variable Geometry Turbocharger (VGT)** mampu menghasilkan torsi dan tenaga maksimal di putaran mesin yang rendah.



Dengan **Exhaust Gas Recirculation (EGR)** dan **Positive Crankcase Ventilation (PCV)** yang didukung oleh **Diesel Oxidation Catalyst (DOC) Muffler** menghasilkan emisi gas buang ramah lingkungan.



Chassis Kuat


Chassis tebal tanpa sambungan dengan posisi kelingan (rivet) di sisi samping, sehingga meningkatkan daya tahan chassis dan mempermudah dalam pemasangan *rear body*.

Keselamatan & Kenyamanan



Full Air Brake System + ABS

Dengan pengereman **Full Air Brake System + ABS**, dapat menambah keamanan saat di perjalanan.



Telematic System



Real time monitoring



Job order planning



Report / Evaluation





Vehicle management



Driver management

Dimensi Kendaraan

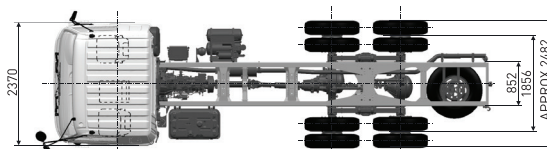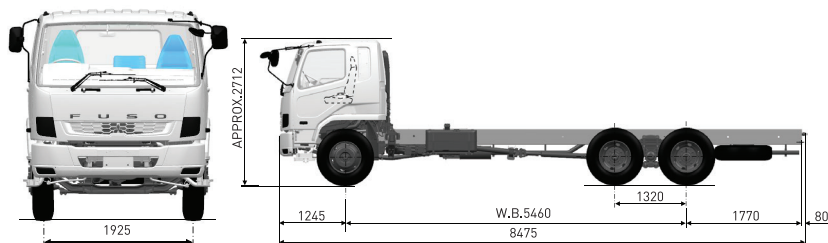

Manufactured at PT Krama Yudha Ratu Motor, Jakarta- Indonesia

MODEL 6x4 : FN62F HD R

DIMENSI	KEMAMPUAN	REM
Jarak Sumbu Roda 5.460 mm	Kecepatan Maksimum 77 km/jam (FN62F HD R)	Rem kaki (Service brake) Full air, dual circuit, wedge type
Panjang Keseluruhan 8.475 mm	76 km/jam (FN62F HD)	Rem tangan (Parking brake) Spring loaded type on rear wheels by hand control valve
Lebar Keseluruhan 2.482 mm	Daya tanjak dengan Max G.V.W 58 %	Rem pembantu Sistem pengereman gas buang (Exhaust brake)
Tinggi Keseluruhan 2.712 mm	Radius putar minimum 9.0 m	
Jarak roda depan kiri-kanan 1.925 mm	BAN & RODA *Tersedia 2 tipe ban: Radial & Bias	
Jarak roda belakang kiri-kanan 1.856 mm	Ban depan Tunggal, 11.00-20-16PR	
	Ban belakang Ganda, 11.00-20-16PR	
KABIN PENGEMUDI	KAPASITAS BAHAN BAKAR	SUSPENSI
Tipe All steel, tilt cab	Tangki 200 liter	Depan Laminated leaf springs dengan shock absorber
(Kabin Jungkit)		Belakang Inverted and laminated leaf springs with trunion base and radius rods
		KEMUDI
		Tipe Ball nut type with integral type hydraulic power booster, telescopic & tilt steering column with steering lock

BERAT	TRANSMISI	MESIN
Berat chassis termasuk kabin 7.375 kg (FN62F HD R)	Model EATON ES-11109	Model 6M60 - DAT6
7.270 kg (FN62F HD)	Tipe 9 gigi maju dan 1 gigi mundur	Tipe 4 Stroke-cycle water cooled direct injection turbocharged diesel engine, Common Rail, EURO4
Depan 3.050 kg (FN62F HD R)	Perbandingan gigi 12.640 - 8.810 - 6.550 - 4.770 - 3.550 - 2.480	Diameter X Langkah 118x115 mm
3.000 (FN62F HD)	- 1.850 - 1.340 - 1.000 Mundur 13,21	Isi Silinder 7.545 cc
Belakang 4.325 kg (FN62F HD R)	Perbandingan gigi akhir 7.400	Daya Maksimum 270/2.400 PS/rpm
4.270 (FN62F HD)	Tipe Kopling Hydraulic control, coil spring type, single dry plate with air pressure assistance	Torsi Maksimum 880/1.200 - 2.000 Nm/rpm
Max G.V.W 26.000 kg		
Depan 6.000 kg	SISTEM KELISTRIKAN	
Belakang 20.000 kg	Tegangan 24 V	

CATATAN : Untuk peningkatan & penyesuaian dengan perkembangan teknologi, spesifikasi ini sewaktu-waktu dapat berubah tanpa pemberitahuan terlebih dahulu.

*Syarat dan ketentuan berlaku.